



版本	标识	修改内容	修改日期	签名
	△			


Front view

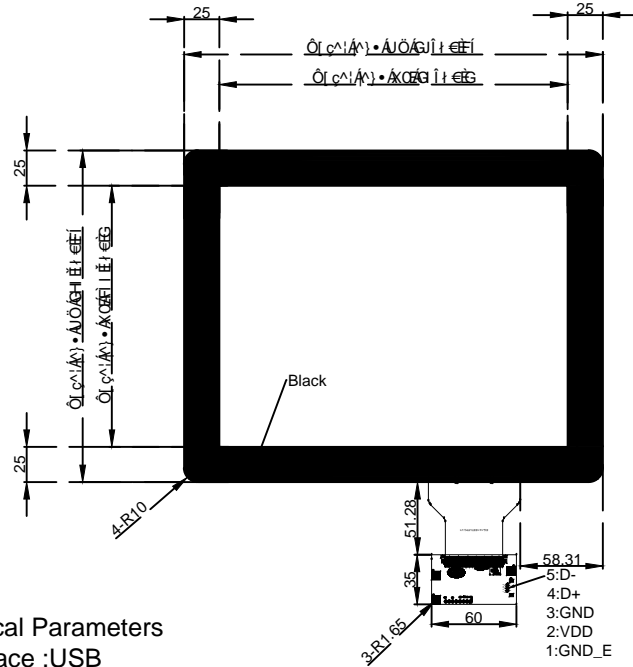

Side view

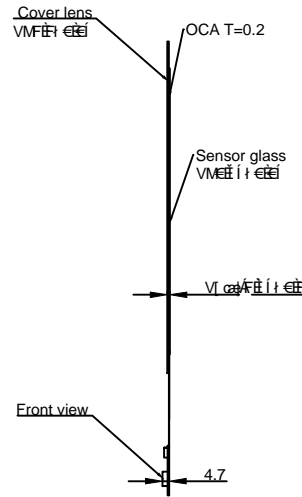

Back view

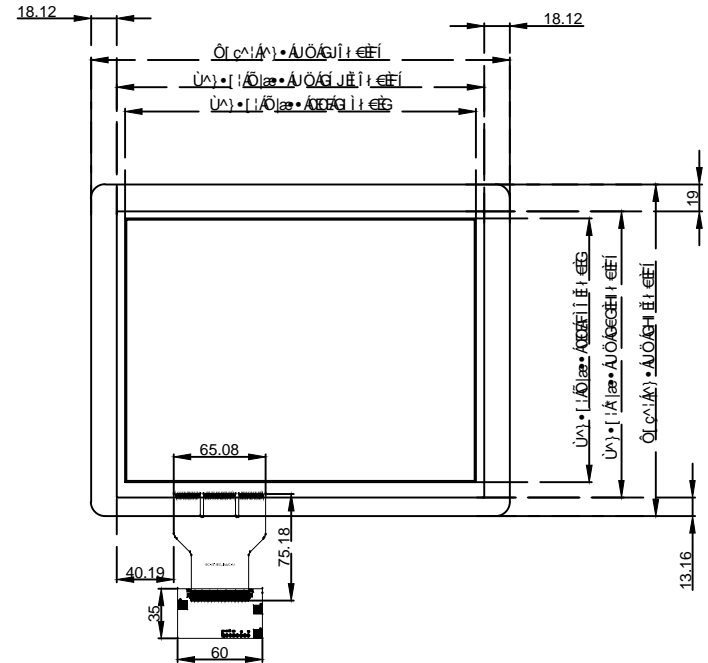

Technical Parameters

- 0:Interface :USB
- 1; Touch point: 10
- 2: Cover lens + Sensor glass + OCA+FPC
- 3: Cover lens Thickness =1.1mm
- 4: Sensor glass Thickness = 0.55mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 1.85mm
- 7: Sensor Process: Print Process(ITO Pattern) + Laser(Metal Line)
- 8: Input Voltage 3.5V~5.5V.Typical 5V
- 9:Transmittance:>85%
- 10: Surface Hardness:>6H
- 11: Operating Conditions :-10 to 70 °C
- 12: Storage Conditions :-20 to 70 °C
- 13: Relative Humidity:95% at 60°C, RH Non-condensing

深圳市友联亨达光电有限公司					
制图	王壮皮	2015.08.24	材质	玻璃	12.1(4:3)
审核			比例	1:1	
批准			单位	mm	图纸名称
				第 1 页 共 1 页	图纸编号
					12.1CTP
					EG-12.1-002-V1