




版本	标识	修改内容	修改日期	签名
	△			

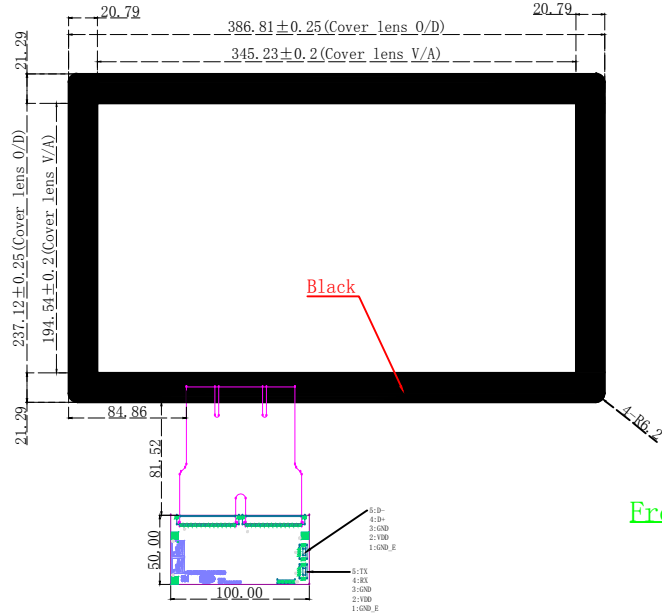

Front view

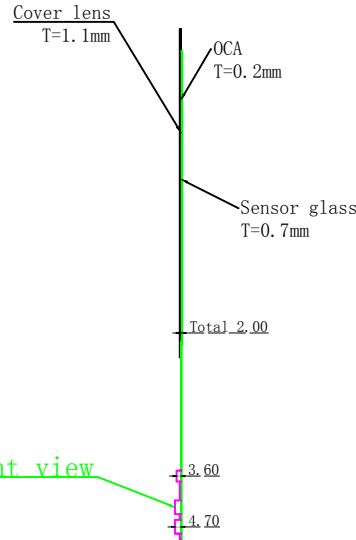

Side view

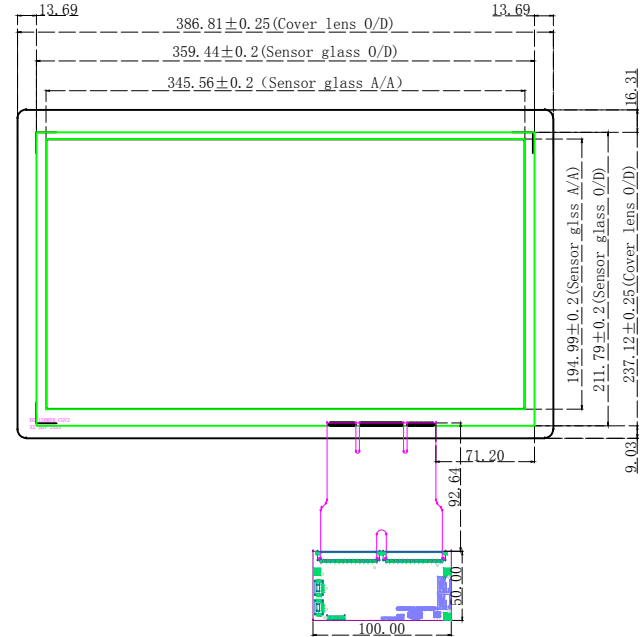

Back view

Technical Parameters

- 0: Interface :USB/UART
- 1: Touch point: 10 (win7 and win8) , (UART touch point:2)
- 2: Cover lens + Sensor glass + OCA+FPC
- 3: Cover lens Thickness = 1.1mm
- 4: Sensor glass Thickness = 0.7mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 2mm
- 7: Sensor Process: Print Process (ITO Pattern +Metal line)
- 8: Input Voltage 3.5V~5.5V. Typical 5V
- 9: Transmittance:>85%
- 10: Surface Hardness:>6H
- 11: Operating Conditions :-10 to 70 °C
- 12: Storage Conditions :-20 to 70 °C
- 13: Relative Humidity:95% at 60°C, RH Non-condensing
- 14: Dimension tolerance:±0.2mm

Ever Glory(Shenzhen) Photoelectricity Co.,Ltd						
Drawing By	王壮皮	2015.04.08	Materials	Glass	15.6"	
Checked By			Scale	1:1		
Approved By			Units	mm	Drawing Name	15.6 CTP
			第 1 页 共 1 页		Drawing No.	EG-15.6-003-V1