
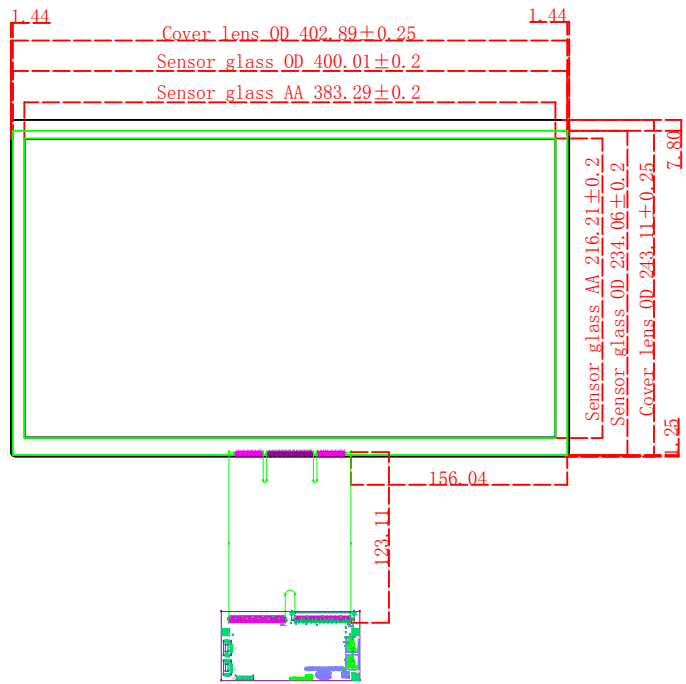
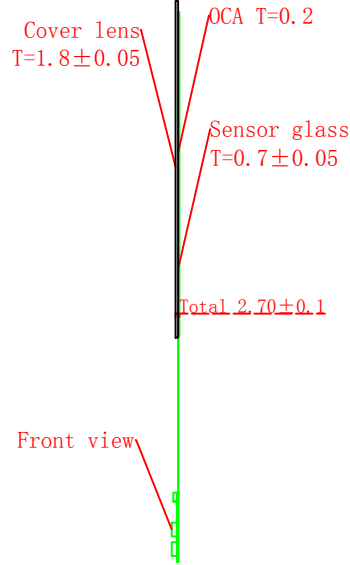


Front view

Side view

Back view

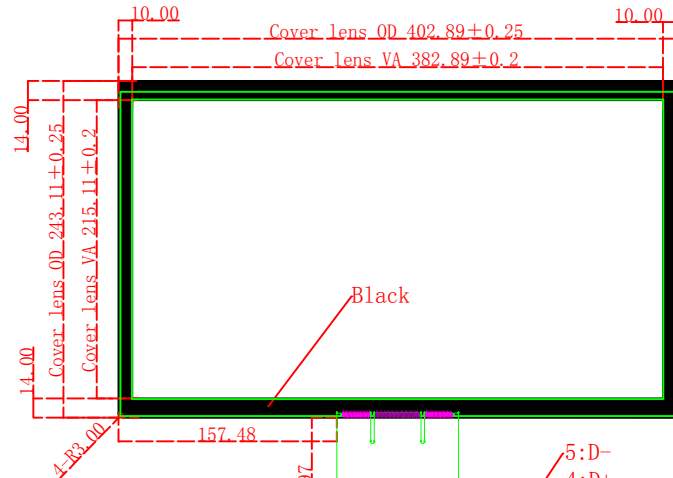

- 5: D-
- 4: D+
- 3: GND
- 2: VDD
- 1: GND_E

- 5: TX
- 4: RX
- 3: GND
- 2: VDD
- 1: GND_E

Technical Parameters

- 0: Interface :USB
- 1: Touch point: 10
- 2: Cover lens + Sensor glass + OCA+FPC
- 3: Cover lens Thickness = 1.8mm
- 4: Sensor glass Thickness = 0.7mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness =2.7mm
- 7: Sensor Process: Print Process (ITO Pattern) +Laser Ag(Metal line)
- 8: Input Voltage 3.5V~5.5V.Typical 5V
- 9: Transmittance:>85%
- 10: Surface Hardness:>6H
- 11: Operating Conditions :-10 to 70 °C
- 12: Storage Conditions :-20 to 70 °C
- 13: Relative Humidity:95% at 60°C, RH Non-condensing
- 14: Dimension tolerance:±0.2mm

Drawing By		王壮皮	2015.04.21	Materials	Glass	17.3"	
Checked By				Scale	1:1		
Approved By				Units	mm	Drawing Name	17.3 CTP
		第 1 页 共 1 页				Drawing No.	EG-173-001-V1