



Front view

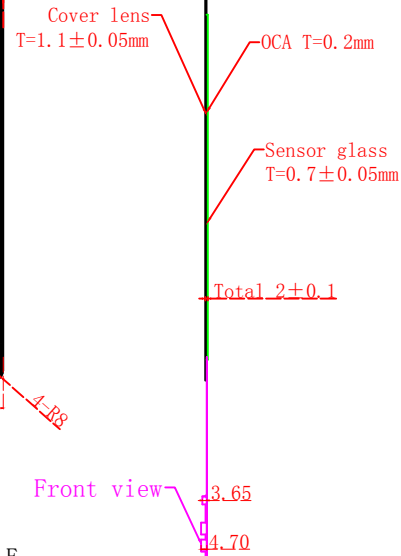

Side view

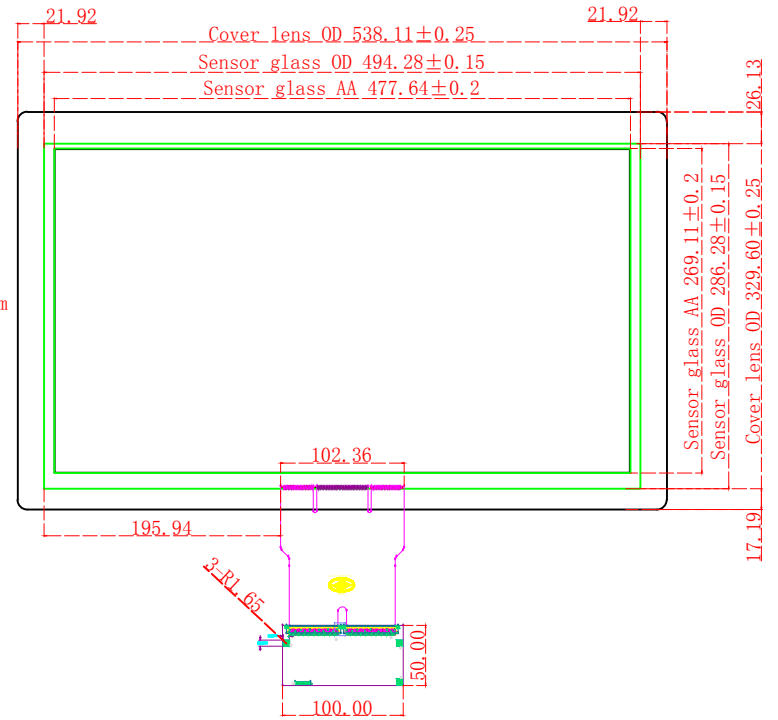

Back view

Technical Parameters

- 0: Interface :USB/URAT
- 1: Touch point: 10 (win7 and win8) , (URAT touch point:2)
- 2: Cover lens + Sensor glass + OCA+FPC
- 3: Cover lens Thickness = 1.1mm
- 4: Sensor glass Thickness = 0.7mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 2 mm
- 7: Sensor Process: Exposure ITO Pattern + laser Ag(Metal line)
- 8: Input Voltage 3.5V~5.5V.Typical 5V
- 9: Transmittance:>85%
- 10: Surface Hardness:>6H
- 11: Operating Conditions :-10 to 70 °C
- 12: Storage Conditions :-20 to 70 °C
- 13: Relative Humidity:95% at 60°C, RH Non-condensing
- 14: Dimension tolerance:±0.2mm
- 15: AA=Active Area;OD=Outline Dimeesion;VA=View Area

Ever Glory(Shenzhen) Photoelectricity Co.,Ltd					
Drawing By	王壮皮	2014.11.05	Materials	Glass	21.5"
Checked By			Scale	1:1	
Approved By			Units	mm	Drawing Name
				第 1 页 共 1 页	21.5 CTP
					Drawing No.
					EG-21.5-006-V6