




Front view

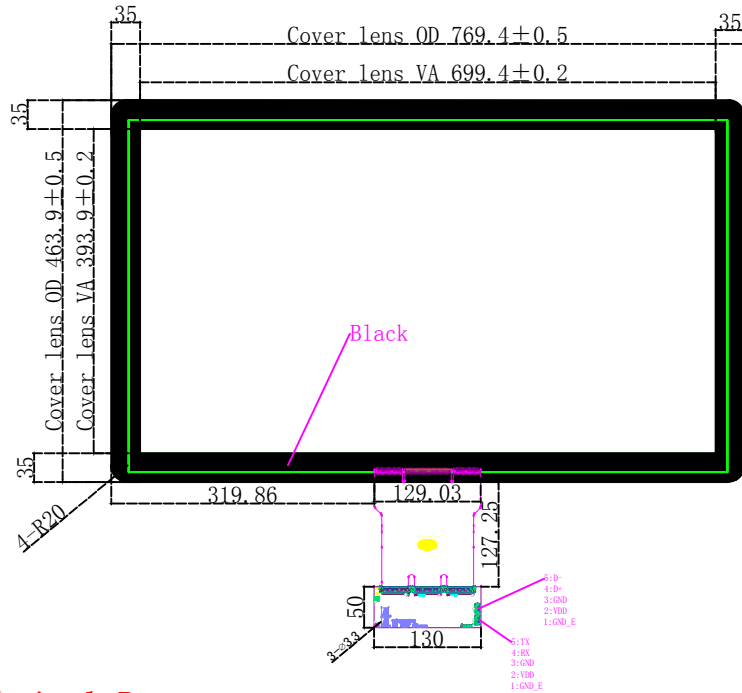

Side view

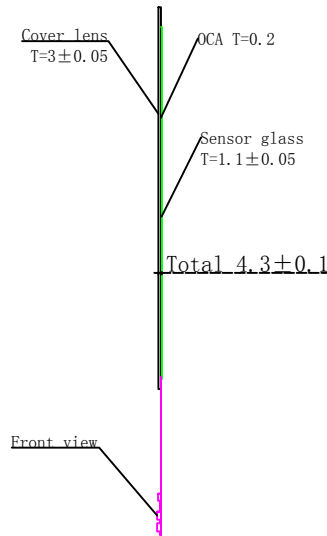

Back view

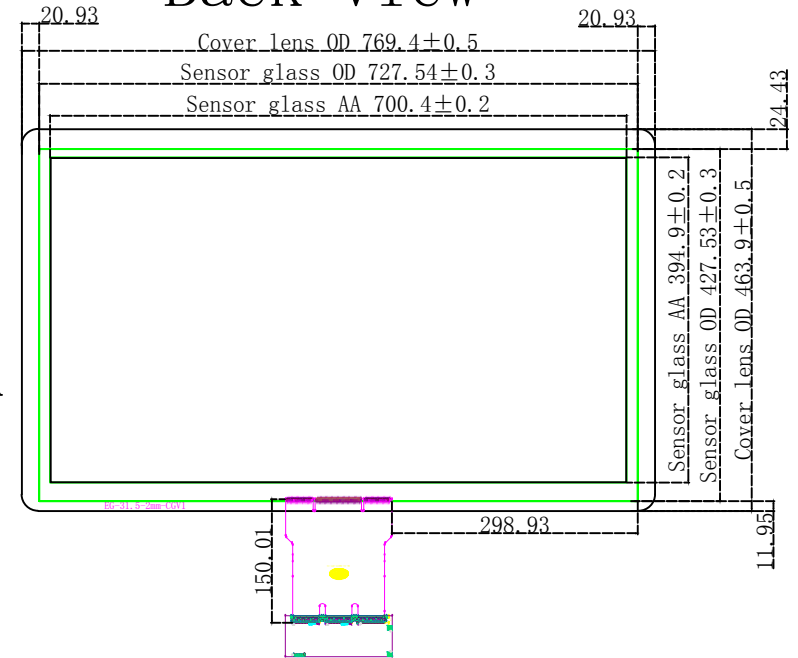

Technical Parameters

- 0: Interface :USB
- 1: Touch point: 10
- 2: Cover lens + Sensor glass + OCA+FPC
- 3: Cover lens Thickness =3.0mm
- 4: Sensor glass Thickness = 1.1mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 4.3mm
- 7: Sensor Process: Print Process (ITO Pattern + Metal line)
- 8: Input Voltage 3.5V~5.5V.Typical 5V
- 9:Transmittance:>85%
- 10: Surface Hardness:>6H
- 11: Operating Conditions :-10 to 70 °C
- 12: Storage Conditions :-20 to 70 °C
- 13: Relative Humidity:95% at 60°C, RH Non-condensing
- 14: Dimension tolerance:±0.2mm

Ever Glory(Shenzhen) Photoelectricity Co.,Ltd					
Drawing By	王壮皮	2015.08.04	Materials	Glass	31.5"
Checked By			Scale	1:1	
Approved By			Units	mm	Drawing Name
				第 1 页 共 1 页	31.5 CTP
					Drawing No.
					EG-31.5-001-V1