
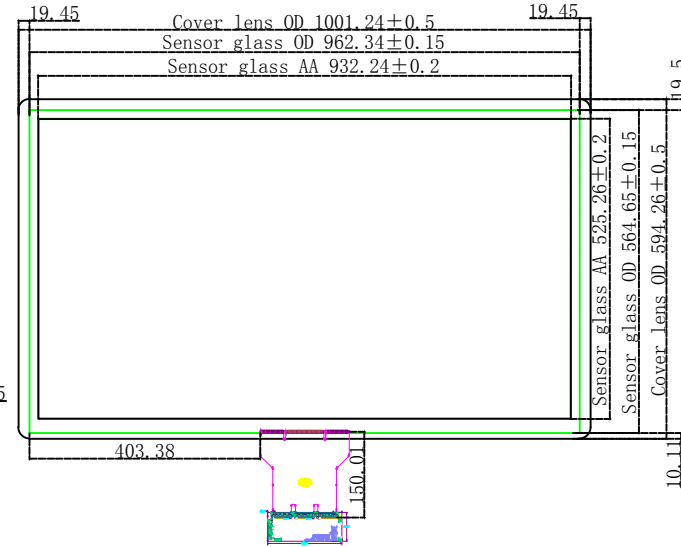
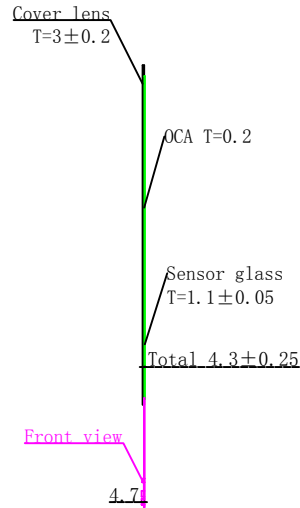


Front view

Side view

Back view

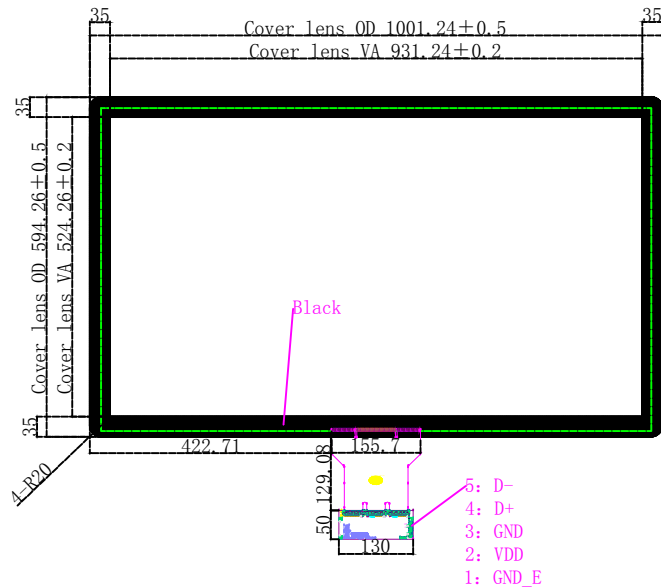

Technical Parameters

- 0: Interface :USB
- 1: Touch point: 10
- 2: Cover lens + Sensor glass + OCA+FPC
- 3: Cover lens Thickness =3.0mm
- 4: Sensor glass Thickness = 1.1mm
- 5: OCA Thickness = 0.2mm
- 6: Total Thickness = 4.3mm
- 7: Sensor Process: Print Process (ITO Pattern + Metal line)
- 8: Input Voltage 3.5V~5.5V. Typical 5V
- 9: Transmittance: >85%
- 10: Surface Hardness: >6H
- 11: Operating Conditions : -10 to 70 °C
- 12: Storage Conditions : -20 to 70 °C
- 13: Relative Humidity: 95% at 60°C, RH Non-condensing
- 14: Dimension tolerance: ±0.2mm

Ever Glory (Shenzhen) Photoelectricity Co., Ltd					
Drawing By	王壮皮	2015.09.21	Materials	Glass	42"
Checked By			Scale	1:1	
Approved By			Units	mm	Drawing Name
				第 1 页 共 1 页	42 CTP
					Drawing No.
					EG-42-001-V1